SMCS - 1306

SENR74100003

Remove & Install Oil Filter Base

Tools Needed	A
2P8250 Strap Wrench	1

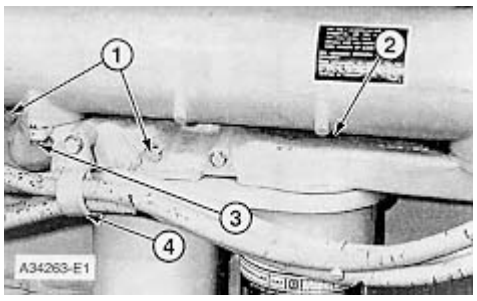

1. Remove the oil filters with Tool (A).

NOTE: Upon installation, install the oil filters according to the instructions on the filters.

2. Remove hose clamp (4).

3. Remove six bolts (1).

4. Remove four bolts (3).

5. Remove oil filter base (2).

NOTE: Check the O-ring seals on the filter base for damage or wear and replace if necessary. Put clean engine oil on the O-ring seals upon installation.

NOTE: For installation of the oil filter base, reverse the removal steps.

6. Check the engine oil for the correct level.

PSP-000890C4
2022/11/30
15:40:22-03:00
SENR74100003
© 2022 Caterpillar Inc.
Caterpillar:
Confidential Green

PSP-000890C4 2022/11/30 15:40:37-03:00 SENR7410 © 2022 Caterpillar Inc. Caterpillar: Confidential Green